



TRANSFER SETTINGS

MiniMed™ 630G Pump to MiniMed™ 770G Pump

Transfer Settings: MiniMed 630G pump to MiniMed 770G pump

STEP 1 – Copy your current settings onto the Insulin Pump Settings Form. If for any reason you cannot copy the settings, please contact your healthcare professional.

STEP 2 – Insert a AA battery into your new pump. You can use either a lithium, alkaline, or rechargeable battery.

STEP 3 – Follow the instructions found in this guide to enter the settings that you have recorded on the Insulin Pump Settings Form into your new pump. For additional information on your pump, please consult the MiniMed pump system user guide.

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.

Settings from the MiniMed 630G insulin pump

We recommend that you record all settings on this form to refer to as you enter them into the new pump.

•	Jtilities, Sensor Settings		
NSULIN SETTINGS		INSULIN SETTINGS (CONT.)	
BOLUS WIZARD SE		PRESET BOLUS SETUP:	
	ttings > Bolus Wizard Setup	Menu > Insulin Settings > Preset Bolus Setup	
Bolus Wizard: 🗆 O	n ∐ Off	Preset Bolus Name:	
Carb Ratio:		Bolus: U Type:	
12:00 A		Now Square	
		Duration hr	
	g/U	BOLUS INCREMENT:	
nsulin Sensitivity		Menu > Insulin Settings > Bolus Increment	
12:00 A	mg/dL/U	\square 0.025 U \square 0.05 U \square 0.1 U	
	mg/dL/U	MAX BASAL/BOLUS:	
	mg/dL/U	Menu > Insulin Settings > Max Basal/Bolus	
3G Target:		Max Basal: U/hr Max Bolus: U	
	mg/dL	EASY BOLUS:	
	mg/dL	Menu > Insulin Settings > Easy Bolus	
	mg/dL	☐ On ☐ Off Step Size U	
	e: hr	AUTO SUSPEND:	
BASAL PATTERN S		Menu > Insulin Settings > Auto Suspend	
Menu > Insulin Se	ttings > Basal Pattern Setup	Alarm: \square On \square Off	
Basal 1:		Time: hr	
12:00 A	U/hr	BOLUS SPEED:	
	U/hr	Menu > Insulin Settings > Bolus Speed	
	U/hr	☐ Standard ☐ Quick	
Basal Pattern Nam	ne:	UTILITIES	
12:00 A	U/hr	DISPLAY OPTIONS:	
	U/hr	Menu > Utilities > Display Options	
	U/hr	Brightness \square Auto	
PRESET TEMP SETU	UP:	Backlight sec / min	
	ttings > Preset Temp Setup	REMOTE BOLUS:	
Preset Temp Name	e:	Menu > Utilities > Remote Bolus	
Гуре: ∐ Rate	U/hr □ Percent %	☐ On ☐ Off	
Duration	_hr	CARB UNIT:	
DUAL/SQUARE WA		Menu > Utilities > Carb Unit	
	ttings > Dual/Square Wave	☐ Grams ☐ Exchanges	
Dual: ☐ On ☐ Off		SENSOR SETTINGS	
Square: \square On \square O	ff	Menu > Sensor Settings	
		Sensor:	
		☐ On ☐ Off	
ensor Settings			
-			

HIGH SETTINGS Menu > Sensor Settings > High Settings				
Time Period	High Limit	Alert before High	Alert on High	Rise Alert ^a
12:00 A	mg/dL	□ On min	□On	\square On mg/dL/min or $\uparrow \mid \uparrow \uparrow \mid \uparrow \uparrow \uparrow$
	mg/dL	□ On min	□On	\square On mg/dL/min or $\uparrow \mid \uparrow \uparrow \mid \uparrow \uparrow \uparrow$
	mg/dL	□ On min	□On	\square On mg/dL/min or $\uparrow \mid \uparrow \uparrow \uparrow \uparrow \uparrow$
High Snooze: minutes				

^a Option only available when Rise Alert is on

LOW SETTINGS Menu > Sensor Settings > Low Settings					
Time Period	Low Limit	Alert before Low	Suspend on Low	Alert on Low	
12:00 A	mg/dL	□On	□On	□On	
	mg/dL	□On	□On	□On	
	mg/dL	□On	□On	□On	
Low Snooze: minutes					


Programming the MiniMed 770G insulin pump

Startup Wizard

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.

Once you've inserted the battery, the pump powers up and the Startup Wizard begins, it will guide you through setting language, time format, and current time and date.

- 1. Select English.
- When the Select Time Format screen appears, select a 12 Hour or a 24 Hour time format.
- When Enter Time screen appears, the hour will be flashing. Press ∧ or ∨ to the correct hour and press ○.
- The AM / PM will be flashing. Press or if needed and press ○. Select Next.
- When the Enter Date screen appears, select Year. Press ∧ or ∨ to the correct year and press ○. Repeat this step to set up Month and Day. Select Next.
- The rewinding screen will briefly appear, followed by a confirmation message.
 Select OK.









Setting Max Basal

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.

Menu > Options > Delivery Settings

- 1. Select Max Basal/Bolus and press O.
- Select Max Basal to enter the U/hr amount. Use and to set the Max Basal amount. Press ○.
- 3. Select Save.






Setting Max Bolus

 $\textbf{Note:} \ \text{The settings shown in this guide are for illustration purposes only} \ -- \ your \ \text{settings may be different.}$

Menu > Options > Delivery Settings

- 1. Select Max Basal/Bolus and press O.
- 3. Select Save.





Setting Basal Pattern

Note: The pump is intended to be used with a basal pattern. The basal pattern must be manually entered and saved into the pump. There will be no reminder message to program basal rates. Consult a healthcare professional to determine what basal pattern is needed. For more information about basal patterns, consult the MiniMed 770G System User Guide.

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.

Menu > Basal > Delivery Settings > Basal Pattern Setup

- 1. Select Basal 1.
- 2. Select Options, then select Edit.
- 3. Press to enter **End** time. Press to leave the **End** time at **12:00A**. If you are setting multiple rates use ∧ or ∨ to change the **End** time and press ○.
- 4. Press ∧ to enter **U/hr** and press ○.
- Continue adding End times and basal rates as needed. The End time for your last rate must be 12:00A.
- The **Done** option appears only when the last **End** time in your basal pattern is set to **12:00A**. Select **Done** after all settings are entered to go to the next screen.

Note: Your basal rates have not yet been saved.

A screen appears that lets you review your basal pattern. Press \checkmark to review all the settings. If you need to make any changes, press \diamond to return to the previous screen (Edit screen).

Note: If you press to return to the Edit screen without saving, your changes will not be saved. After making any changes on the Edit screen, select **Done** to return to the review screen.

7. Select Save. If you do not select Save, your changes are not saved.

Basal Pattern Setup		
0.0 ∪ 🗸		
Add New		

Edit Basal 1				
Start	End	U/hr		
12:00 A	3:00 A	0.600		
3:00 A	9:00 A	0.650		
9:00 A	12:00 A	0.600		
Done				





CAUTION: If you have not pressed Save after settings are entered and the screen goes dark, the entered settings will not be saved.

Turn Bolus Wizard On and Setup

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.

Menu > Options > Delivery Settings > Bolus Estimate Setup

- 1. Select Bolus Wizard to turn On.
- 2. Press \vee to see the rest of the message then select **Next**.
- 3. Review the description of Carb Ratio and select Next.
- Press to enter End time. Press again to leave the End time at 12:00A. If
 you are setting multiple Carb Ratios use ∧ or ∨ to change the End time,
 then press ○.
- Press o or to enter g/U then press O. Continue adding End times and Carb Ratios as needed.
- 6. Select Next when done.
- 7. Review the description of **Sensitivity Factor** and select **Next**.

- 10. Select Next when done.
- 11. Review the description of BG Target and select Next.
- Press to enter End time. Press again to leave the End time at 12:00A. If you are setting multiple BG Targets, use ^ or ∨ to change the End time, then press ○.
- 13. Press \wedge or \vee to enter **Lo** and then press \circ .
- Press or to enter Hi and then press Continue adding End times and BG Targets as needed.
- 15. Select Next when done.
- 16. Review the description of Active Insulin Time and select Next.
- 17. Press O to enter **Duration** time.
- 18. Press \wedge or \vee to enter **hr** then press \circ .
- 19. Select Save.

The **Bolus Wizard** setup is now complete.





Turn Sensor On

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.

Menu > Options > Utilities > Sensor Settings

 Select Sensor to turn feature On. You can now access the SmartGuard menu and enter the settings.





Programming High Settings

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.

Menu > Options > SmartGuard

- 1. Select High Setup.
- Press on the time segment. Press again to leave the End time at 12:00A. If setting multiple time segments, press ∧ to enter End time of first segment, and press ○.
- 3. Press ∧ or ∨ to set Hi limit and press O. Press O to continue.
- 4. Select each feature you wish to turn on. If a feature is on, select it again to turn it back off.
- 5. Once settings are selected, select **Next** and then select **Done**.
- 6. Verify that settings are correct and select Save.
- If snooze time needs to be changed, press

 to Snooze and press ○. Select
 High Snooze. Press or to the correct time and press ○. Select Save.

Your **High Setup** is now complete.








Programming Low Settings

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.


Menu > Options > SmartGuard

- 1. Select Low Setup.
- Press on the time segment. Press again to leave the End time at 12:00A. If setting multiple time segments, press ∧ to enter End time of first segment, and press ○.
- 3. Press ∧ or ∨ to set **Lo** limit and press ○. Press to continue.
- 4. Select each feature you wish to turn on. If a feature is on, select it again to turn it back off.
- 5. Once settings are selected, select **Next** and then select **Done**.
- 6. Verify that settings are correct and select Save.

Your **Low Setup** is now complete.







Go to Pair the Transmitter, page 7 to continue programming sensor settings.

Turn Auto Mode On

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.

Menu > Options > SmartGuard

- 1. Select Auto Mode.
- 2. Select Auto Mode again to turn Auto Mode On.
- 3. Check the screen to make sure that Auto Mode is set to **On**. Select **Save**.

Note: If SmartGuard Auto Mode is not yet ready, after selecting **Save** an alert occurs instructing to check the Auto Mode Readiness screen.





Note: The SmartGuard Auto Mode warm-up period begins the midnight after the pump starts delivering insulin. If you turn Auto Mode on before the warm up is complete, you may receive an alert at midnight to Enter a BG for Auto Mode. You may want to wait until day 3 of your pump wear to avoid this alert at midnight.


Pair the Transmitter

Note: The settings shown in this guide are for illustration purposes only — your settings may be different.

Menu > Options > Utilities > Device Options > Pair Device

- Attach Guardian™ Link (3) transmitter to the charger and place next to the pump.
- Select Search on the pump and immediately remove the transmitter from the charger.
- 3. The **Select Device** screen appears with a list of available devices. Select the **CGM** device that matches the serial number (**SN**) on your transmitter.
- 4. Make sure the serial number on the pump screen and transmitter match and select **Confirm**.

Your pump displays a message if the pump and transmitter are paired successfully. If the Sensor feature is turned on, the Connection icon $\widehat{\nabla}$ appears on the Home screen.

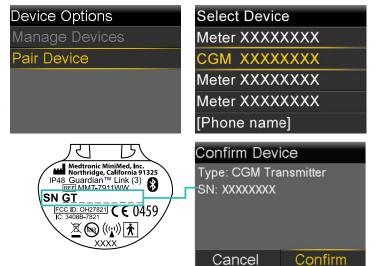

Note: Please take some time to review ALL your entries and ensure they have been correctly saved.

Technical Support

Call 1.800.646.4633

In Need of Technical Assistance?

24-Hour Technical Support is here to help

For medical advice, contact your healthcare team.

Medtronic



Medtronic MiniMed

18000 Devonshire Street Northridge, CA 91325 USA 1 800 646 4633 +1 818 576 5555 www.medtronicdiabetes.com

RF: M994838A001

© 2022 Medtronic M037254C001_1 2022-10-19



M037254C001